

This Page Is Inserted by IFW Operations  
and is not a part of the Official Record

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning documents *will not* correct images,  
please do not report the images to the  
Image Problems Mailbox.**

DECLARATION

I, Toshizo Iida of Ishii Bldg., 3F, 1-10, Shimbashi 3-chome, Minato-ku, Tokyo, 105-0004 Japan, do solemnly and sincerely declare that I well understand the English and Japanese languages and that the attached English translation is correct and faithful translation, made by me, and for which I accept responsibility, of Japanese Patent Application No. 2001-58277, filed in Japan on March 2, 2001.

April 8th, 2004  
Date  
At Tokyo

  
Toshizo IIDA  
Patent Attorney

(Name of Document) PATENT APPLICATION

(Document number) 11801338

(Filing Date) March 2, 2001

(Addressed to) Commissioner of the Japanese

5 Patent Office, Kozo OIKAWA

(Title of the Invention) Compact Fuel Cell

(Inventor)

(Domicile or Address) c/o National Institute of

Material and Chemical Research, in Advanced Industrial

10 Science and Technology, in Ministry of Economy, Trade and

Industry, of 1-1, Higashi, Tsukuba-shi, Ibaraki

(Name) Tatsuhiro OKADA

(Inventor)

(Domicile or Address) c/o Institute of Engineering

15 Machanics and Systems, University of Tsukuba, of 1-1-1

Tennodai, Tsukuba-shi, Ibaraki

(Name) Shin-ya ISHIMARU

(Inventor)

(Domicile or Address) c/o National Institute of

20 Osaka Industrial Research, in Advanced Industrial Science

and Technology, in Ministry of Economy, Trade and Industry,

of 8-31, Midorigaoka 1-chome, Ikeda-shi, Osaka

(Name) Keisuke OGURO

(Inventor)

25 (Domicile or Address) c/o Institute of Engineering

Machanics and Systems, University of Tsukuba,  
of 1-1-1 Tennodai, Tsukuba-shi, Ibaraki

(Name) Masayoshi ISHIDA

(Inventor)

5 (Domicile or Address) c/o Research Center, in  
Asahi Glass Co. Ltd., of 1150 Hazawa-cho, Kanagawa-ku,  
Yokohama-shi, Kanagawa

(Name) Masaru YOSHITAKE

(Applicant for Patent)

10 (Identification Number of the Applicant) 301000011

(Name) Secretary of National Institute of  
Advanced Industrial Science and Technology, Kazumasa  
KUSAKA

(List of Articles Submitted)

15	(Designation of Article)	Specification	1
	(Designation of Article)	Drawing	1
	(Designation of Article)	Abstract	1

(Need of Proof) Needed

(Document name) Specification

(Title of the invention) COMPACT FUEL CELL

(Claims)

(Claim 1) A compact fuel cell, comprising a tubular  
5 polymer electrolyte membrane, with a fuel electrode on one  
of inner and outer sides of the membrane, and with an air  
electrode on the other side of the membrane.

(Claim 2) The compact fuel cell according to claim  
1, wherein said fuel electrode and said air electrode each  
10 are composed of a carbon particle material on the surface  
of which catalyst fine-particulates are dispersed and  
loaded.

(Claim 3) The compact fuel cell according to claim  
1, wherein said tubular polymer electrolyte membrane has a  
15 catalyst layer deposited or coated on a surface thereof.

(Claim 4) The compact fuel cell according to any  
one of claim 1 to 3, wherein fuel is brought into contact  
with said fuel electrode on the surface of said tubular  
polymer electrolyte membrane, and an oxidizer is brought  
20 into contact with said air electrode on the surface of  
said tubular polymer electrolyte membrane.

(Claim 5) The compact fuel cell according to any  
one of claim 1 to 4, wherein said fuel cell is utilized as  
a power source of a portable device.

25 (Detailed description of the invention)

(0001)

(Technical Field to which the Invention Belongs)

The present invention relates to a low-temperature operating-type fuel cell using a polymer electrolyte, and  
5 more particularly to a transportable fuel cell that can be made compact.

(0002)

(Prior Art)

Fuel cells include low-temperature operating-type  
10 fuel cells, which operate at an operating temperature of as low as 300°C or less, such as polymer electrolyte fuel cells, alkali fuel cells, phosphoric acid fuel cells, and direct methanol fuel cells. Of those, in particular, those having a polymer membrane as an electrolyte, such as  
15 the polymer electrolyte fuel cell and the direct methanol fuel cell, have a number of merits because the electrolyte is not a liquid. For example, if a pressure difference is caused between fuel gas and oxidizer gas (air or oxygen), the fuel cell is run with no problem. In addition, by  
20 setting the thickness of the electrolyte membrane to several tens of micrometers or less, improvement in output power, compactness, and stacking capability can be achieved at the same time. Further, the fuel cell is excellent in starting characteristics and load  
25 responsiveness. Accordingly, application of such fuel

cells to an oncoming electric automobile or domestic stationary power source has recently been receiving attention.

Furthermore, in other application fields than those  
5 described above, application of a fuel cell as a small cell (battery), such as one in a portable device or a transportable power source is gaining a promising feature. Since a fuel cell can generate power instantaneously as soon as a fuel is supplied, it can reduce time required  
10 for charging and is sufficiently competitive in cost, as compared with a secondary battery.

(0003)

A conventional fuel cell is configured such that catalyst layers serving as a fuel electrode and an air  
15 electrode (oxygen electrode), respectively, are arranged on both sides of an electrolyte (flat sheet or flat membrane), and further carbon- or metal-made separator components (materials) each furnished with channels for flowing fuel gas and air (oxygen gas) are provided so as  
20 to sandwich the catalyst layers to form a unit that is called a single-cell. A separator is inserted between any adjacent two cells. The separator prevents mixing of hydrogen that flows into the fuel electrode and air that flows into the air electrode when cells are stacked, and  
25 at the same time, the separator functions as an electronic

conductor for coupling two cells in series. By stacking a necessary number of such single-cells, a fuel cell stack is assembled, and this is further integrated with apparatuses for feeding fuel gas and oxidizer gas, a  
5 control device and the like, to fabricate a fuel cell, by use of which power generation is performed.

(0004)

However, although such a flat-type fuel cell construction is suitable for a design of stacking a number  
10 of electrodes (fuel electrode and air electrode) having large areas, it has a great disadvantage that it cannot respond to the requirement of miniaturization (making it small in size).

Recently, the design of a fuel cell has been  
15 proposed in which only flat-type single-cells are arranged in parallel. In such a case, it is easy to fabricate a small chip and it may have some merits depending on the shape of a small apparatus in which the cell is incorporated. However, it cannot flexibly accommodate the  
20 shapes of various small apparatuses. In particular, the problem as to how to seal the fuel electrode in order to prevent the leakage of fuel remains to be solved.

(0005)

(Problems that the Invention is to Solve)

25 From the above viewpoint, an object of the present



invention is to provide a compact fuel cell can be applied to small portable devices, it can readily retain its gas tightness of the fuel electrode when constructing the compact fuel cell, its catalyst loading property is good, it has flexibility in shape upon fabricating a stack, and it is excellent in productivity.

(0006)

(Means to Solve the Problems)

The inventors of the present invention have found that the above-mentioned problems can be solved at a time, by constructing the fuel cell as follows. That is, a polymer electrolyte membrane that has conventionally been stacked one on another in a flat plate form is formed in a tubular (hollow) form. Further, catalyst layers are arranged on inner and outer sides of the tube so as to serve either as a fuel electrode or an air electrode.

Forming the polymer electrolyte membrane in a tubular form makes it possible to cope with miniaturization (making it small size) by making the tubular electrolyte membrane smaller in diameter. Further, designing the length of tube and thickness of membrane as appropriate, and further connecting the resultant units to each other as appropriate can give rise to cells that can respond to various powers. Since the inside of the tube is excellent in gas tightness, it is particularly suitable

for constructing a fuel electrode. Further, the tubular (hollow) polymer electrolyte membrane not only has excellent flexibility in shape but also retains mechanical strength, so that the issue of how to select the material for a stack raising a problem in designing fuel cell can be solved.

According to the present invention, there are provided the following means:

(1) A compact fuel cell, comprising a tubular polymer electrolyte membrane, with a fuel electrode on one of inner and outer sides of the membrane, and with an air electrode on the other side of the membrane;

(2) The compact fuel cell according to the item (1) above, wherein the fuel electrode and the air electrode each are composed of a carbon particle material on the surface of which catalyst fine-particulates are dispersed and loaded;

(3) The compact fuel cell according to the item (1) above, wherein the tubular polymer electrolyte membrane has a catalyst layer deposited or coated on a surface thereof;

(4) The compact fuel cell according to any one of the items (1) to (3) above, wherein fuel is brought into contact with the fuel electrode on the surface of the tubular polymer electrolyte membrane, and an oxidizer is

brought into contact with the air electrode on the surface of the tubular polymer electrolyte membrane; and

(5) The compact fuel cell according to any one of the items (1) to (4) above, wherein the fuel cell is  
5 utilized as a power source of a portable device.

(0007)

(Modes to Carry out the Invention)

A specific structure of the compact fuel cell according to one embodiment of the present invention will  
10 be explained with reference to the accompanying drawings.

Fig.1 shows one embodiment of a direct methanol fuel cell that embodies the present invention, in which liquid methanol is incorporated into the fuel electrode without passing through a reformer and is used as the fuel.

15 Reference numeral 1 designates a tubular membrane made of a perfluorosulfonic acid-type polymer electrolyte, and on an inside of the tube are filled carbon particles 2 loaded with catalyst particles of platinum-ruthenium alloy (atomic composition, 50:50). The cavity of the tube is  
20 filled with 1.0-M sulfuric acid and a 3-M methanol solution. With this structure, the inside of the tubular membrane constitutes a fuel electrode. On the outer side of the tubular membrane, are deposited platinum particles 3, which are fixed thereto, by a chemical plating method,  
25 to constitute an air electrode (oxygen electrode), which

contacts outside air. Reference numerals 4 and 5 designate external terminals connected to the catalyst layers on the inner side and outer side of the tube, respectively, and corresponding to the output terminals of the fuel cell. If there is a need for connecting units of the fuel cell to each other in series, this is achieved by sequentially connecting the terminal 4 of one fuel cell and the terminal 5 of another fuel cell to each other, successively.

10 (0008)

Fig.2 shows one structure of a fuel cell suitable for the case where the inside of the tube is filled with gaseous fuel, for example, hydrogen, methanol gas or the like. Reference numeral 11 designates a tubular membrane made of a perfluorosulfonic acid-type polymer electrolyte, the inner side of which has a platinum particle layer 12 that is formed by depositing and fixing platinum particles thereon by a chemical plating method, or that is formed by coating thereto carbon particles loaded with platinum. Hydrogen gas or methanol gas is introduced into the inside of the tube, so that the platinum particle layer 12 serves as a catalyst for the fuel electrode. On the outer side of the tube, are deposited and fixed platinum particles 13 by a chemical plating method, and the resultant platinum particles layer constitutes an air electrode upon

20  
25

contacting outside air. Other features are the same as shown in Fig.1.

(0009)

The catalysts for fuel electrode and air electrode  
5 are preferably platinum family metals such as platinum, rhodium, palladium, ruthenium, and iridium. At least one of these metals is deposited and fixed on the inner side surface and outer side surface of the polymer membrane by a chemical plating method. Also, these catalysts may be  
10 fixed by coating or contact bonding the catalyst metal powder onto the membrane surface. Also, a method may be used in which the catalyst metal is dispersed as fine-particulates on the surface of carbon particles and the catalyst-loaded carbon particles are fixed on the inner  
15 and outer sides of the tubular membrane. Further, as described above, the catalyst-loaded carbon particles may be filled inside the tubular membrane.

The fuel electrode and air electrode may be provided on any one of the inner and outer sides of the tubular  
20 membrane. It is preferred that the fuel electrode is provided on the inner side and the air electrode is provided on the outer side of the membrane.

(0010)

As stated above, with regards to the kind and  
25 loading amount of catalysts for the fuel electrode and air

electrode and the method for loading the catalyst, those technologies conventionally used in constructing polymer electrolyte fuel cells, and those technologies conventionally used in forming electrodes employed in a water electrolysis method in which a solid polymer membrane is used (see, for example, Takenaka and Torikai, JP-A-55-38934 ("JP-A" means unexamined published Japanese patent application)) may be used as they are.

(0011)

The electrolyte membrane material to be used is not necessarily limited to the above-mentioned perfluorosulfonic acid-type polymer electrolyte membrane, and it may be selected from a perfluorocarbonic acid-type membrane, a poly-styrene-vinylbenzene-type membrane, a quaternary ammonium-type anion-exchange membrane, and the like, as appropriate.

Further, for example, a membrane made of benzimidazole-based polymer to which phosphoric acid is coordinated and a membrane made of polyacrylic acid impregnated with a concentrated potassium hydroxide solution are also effective, as the electrolyte membrane. In such cases, also for low-temperature operating-type fuel cells, such as phosphoric acid fuel cells and alkali fuel cells, whose operating temperature is about 300°C or less, use of a tubular electrolyte enables construction of

fuel cells in which the fuel electrode and oxygen electrode are separated each other and which can be miniaturized (made compact).

The size (outer/inner diameters), length and film  
5 thickness of the tubular polymer electrolyte membrane may be set as appropriate depending on the output power required for the fuel cell, an apparatus to which the fuel cell is applied, or the like. The tube has an inner diameter of 0.2 to 10 mm, an outer diameter of 0.5 to 12  
10 mm, and a length of 20 to 1,000 mm. Preferably, it has an inner diameter of 0.3 to 5 mm, an outer diameter of 0.5 to 7 mm, and a length of 30 to 500 mm.

(0012)

The fuel is brought into contact with the fuel  
15 electrode on the inner or outer side of the tubular polymer electrolyte membrane in a gaseous or liquid state. The fuel may be fed continuously or filled in a space on the side of the fuel electrode in advance. The oxidizer is brought into contact with the air electrode through the  
20 side of the air electrode of the tubular polymer electrolyte membrane. Since the electrolyte is a tubular membrane, the inside of the tube is gas tight and no leakage occurs, so that there is no fear of mixing of the fuel and oxidizer without resort to any special pass  
25 (channel), separator, or the like. Further, since the

tubular membrane endures the pressure difference across the membrane, control of gas pressure or pressurization can be readily performed.

The compact fuel cell of the present invention has  
5 high output density and low operating temperature of as low as 100°C so that a long-term durability can be expected. Because of easy handling, the fuel cell of the present invention can be utilized as a power source for mobile phones, video cameras, portable devices such as a  
10 note-type personal computer, or a transportable power source.

Note that the feature of the present invention resides in constructing a fuel cell by use of a tubular (hollow) polymer electrolyte membrane. The construction  
15 methods shown in Fig.1 and Fig.2 are only examples, and the present invention is not limited thereto with respect to the design of fuel cells, such as selection of catalysts, formation method of catalyst layers, selection of fuels, feeding methods for fuel and air, and the like.

20 (0013)

(Examples)

Example 1

Hereinafter, the present invention will be illustrated in more detail by way of examples and with  
25 reference to attached drawings. According to the design



shown in Fig.1, a mixed solution of 0.1 M sodium borohydride and 1 M sodium hydroxide was charged inside a tubular Flemion (trade name of a perfluorosulfonic acid-type polymer, produced by Asahi Glass Company, Ltd.) electrolyte membrane having an inner diameter of 0.3 mm, an outer diameter of 0.5 mm and a length of 60 mm, and a 0.1 M aqueous chloroplatinic acid solution was contacted with the outer side of the resultant tube, to form a layer of deposited platinum on the outer side of the tube by a chemical plating method. Thereafter, the entire tube was washed with a sulfuric acid solution, and excess unreacted substance was removed, and at the same time the electrolyte membrane was rendered acid-type. Then, in the inside of the tube was injected, by use of a syringe, a mixture of carbon particles being loaded thereon 45% by mass of a platinum-ruthenium alloy (atomic composition: 50:50) and a mixed solution of 1 M sulfuric acid and 3 M methanol, in a state of suspension. The tip of the syringe was used as it was as a connection terminal of the inner catalyst layer serving as the fuel electrode. On the other hand, a terminal was connected to the platinum deposit layer formed on the outer side of the tube serving as the air electrode. Thus, a single-cell of direct methanol fuel cell was constructed. Fig. 3(a) illustrates current-potential characteristics of the thus-obtained

single-cell, while Fig. 3(b) illustrates current-power characteristics of the obtained single-cell.

(0014)

#### Example 2

5           According to the design shown in Fig.1, a mixed solution of 0.1 M sodium borohydride and 1 M sodium hydroxide was charged inside a tubular Flemion electrolyte membrane having an inner diameter of 0.3 mm, an outer diameter of 0.5 mm and a length of 60 mm, and a 0.1 M  
10   aqueous chloroplatinic acid solution was contacted with the outer side of the resultant tube, to form a layer of deposited platinum on the outer side of the tube by a chemical plating method. Thereafter, the entire tube was washed with a sulfuric acid solution, and excess unreacted  
15   substance was removed, and at the same time the electrolyte membrane was rendered acid-type. Then, in the inside of the tube was injected, by use of a syringe, a mixture of carbon particles being loaded thereon 20% by mass of platinum and a mixed solution of 3 M potassium  
20   hydroxide and 3 M methanol, in a state of suspension. The tip of the syringe was used as it was as a connection terminal of the inner catalyst layer serving as the fuel electrode. On the other hand, a terminal was connected to the platinum deposit layer formed on the outer side of the  
25   tube serving as the air electrode. Thus, a single-cell of

direct methanol fuel cell was constructed. Fig. 4(a) illustrates current-potential characteristics of the thus-obtained single-cell, while Fig. 4(b) illustrates current-power characteristics of the obtained single-cell.

5 (0015)

(Effects of the Invention)

As shown above, according to the present invention, by use of a tubular polymer electrolyte membrane, the fuel cell can be fabricated in a form such that it is adjusted  
10 to the contour of the device to which it is applied. Further, a low-temperature operating-type fuel cell that has extremely flexible, easy to make it small and light in weight can be constructed in a simple manner. In addition, since the fuel electrode is formed on the inner side of  
15 the tube, injection of fuel is easy, no leakage of fuel occurs, and no cumbersome problem such as selection of sealing material or the like occurs.

Further, the method of loading catalysts and the area of electrode can be readily changed in design  
20 depending on the area where the fuel cell is to be applied. The fuel cell as a whole can be made compact (a small fuel cell) and its mass production at low costs is possible.

(Brief Description of the Drawings)

Fig.1 (a) is a schematic diagram showing the fuel  
25 cell using a liquid fuel, according to the present

invention. (b) is an enlarged cross-sectional view of the fuel cell shown in Fig.1(a) along the I-I line therein.

Fig.2 (a) is a schematic diagram showing the fuel cell using a gaseous fuel, according to the present invention. (b) is an enlarged cross-sectional view of the fuel cell shown in Fig.2(a) along the II-II line therein.

Fig.3 (a) is a graph illustrating current-potential characteristics in the fuel cell using methanol fuel, according to the present invention. (b) is a graph illustrating current-power characteristics of the fuel cell shown in Fig.3(a).

Fig.4 (a) is a graph illustrating current-potential characteristics in the fuel cell using methanol fuel, according to the present invention. (b) is a graph illustrating current-power characteristics of the fuel cell shown in Fig.4(a).

(Explanation of reference numerals)

- 1 Tubular membrane made of a polymer electrolyte
- 2 Carbon particles loaded with a platinum-ruthenium alloy
- 3 Layer made of deposited and fixed platinum particles by a chemical plating method
- 4 External terminal connected to the inner side of the tube
- 5 External terminal connected to the outer side of

the tube

11 Tubular membrane made of a polymer electrolyte

12 Layer made of deposited and fixed platinum  
particles by a chemical plating method or coated carbon  
5 particles loaded with platinum


13 Layer made of deposited and fixed platinum  
particles by a chemical plating method

14 External terminal connected to the inner side of  
the tube


10 15 External terminal connected to the outer side of  
the tube

(Document name) Drawing

(Fig.1)

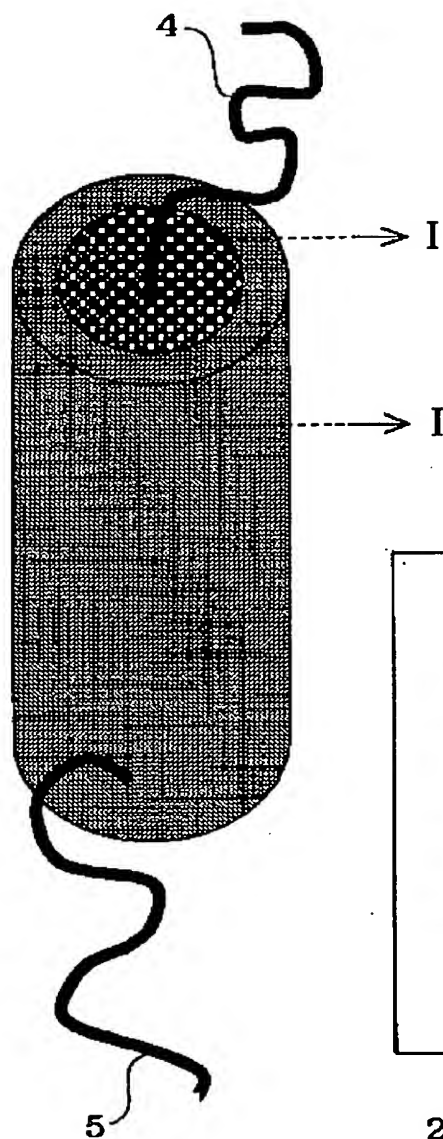


(a)

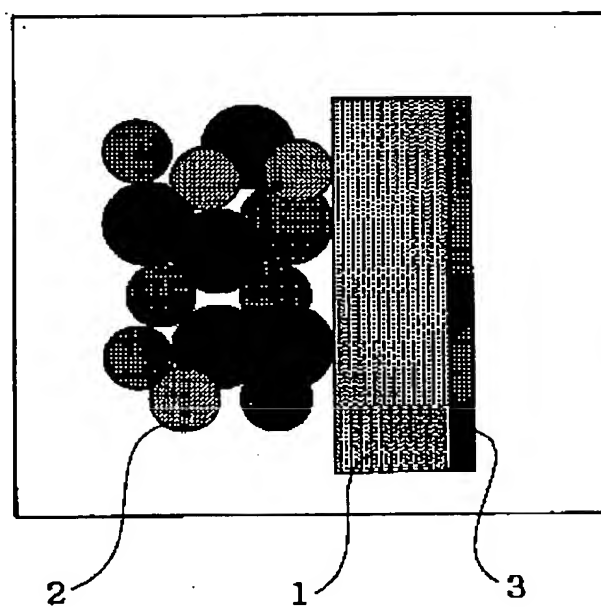


(b)

(Fig. 2)

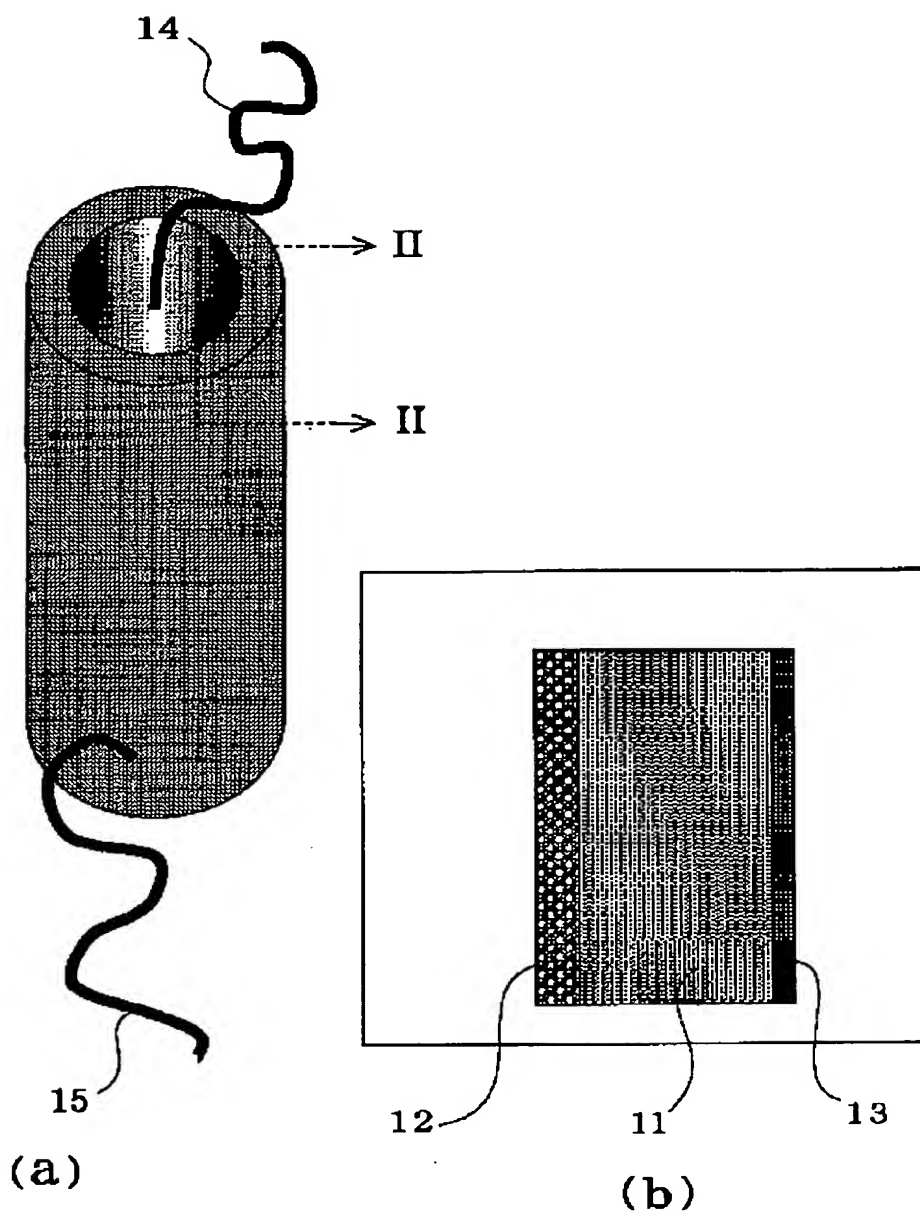


(Fig. 3)

(a)

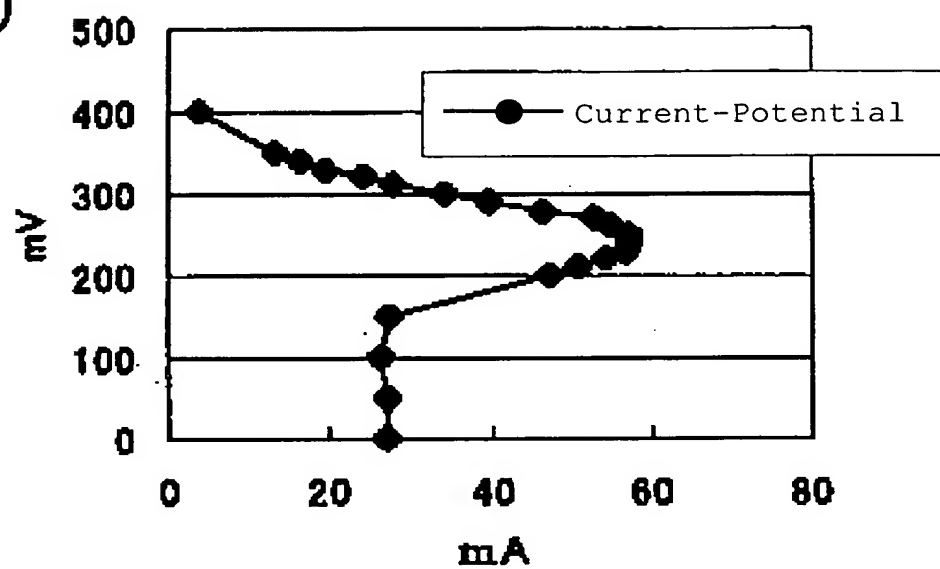


(b)

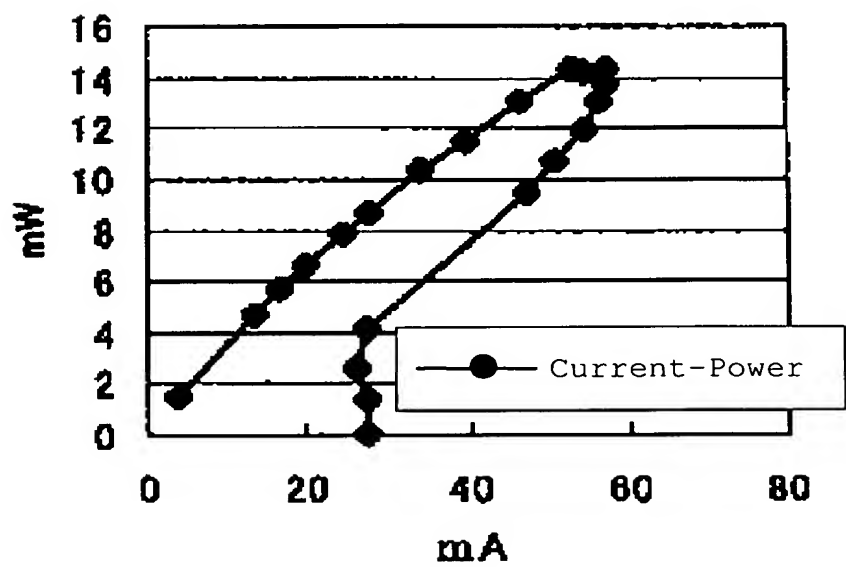




(Fig. 4)

(a)

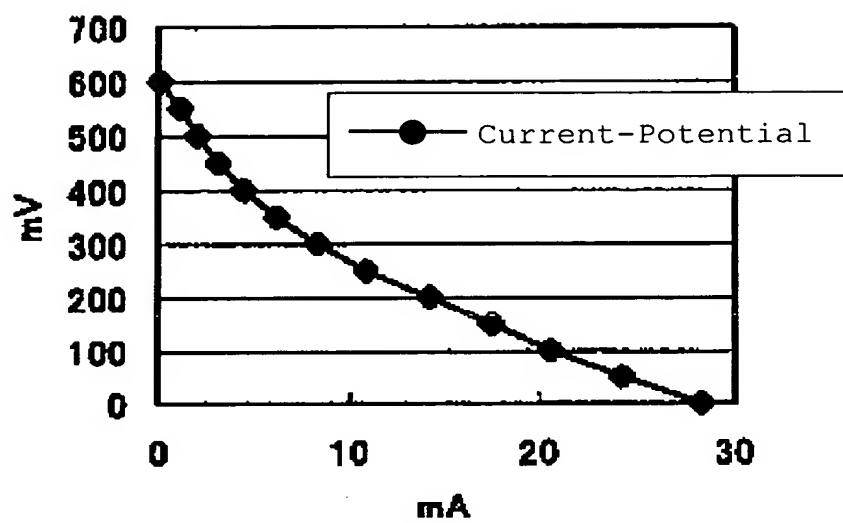

(b)

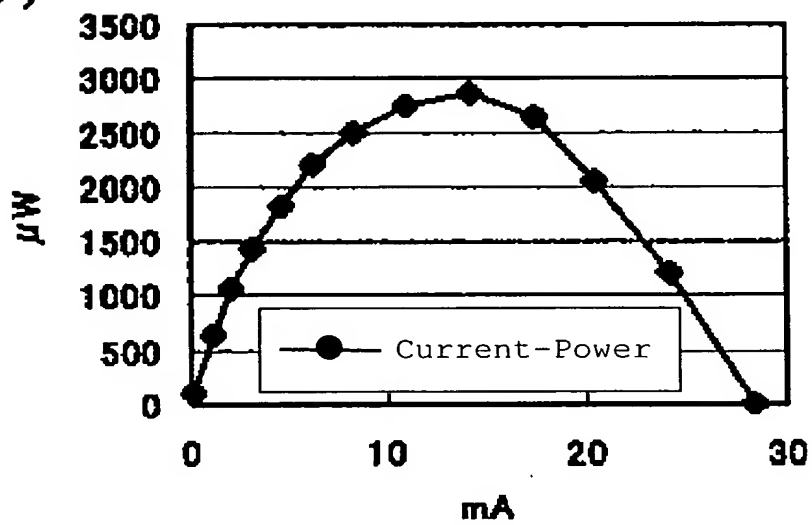

(Name of Document) Abstract

(Abstract)

(Problems) To provide a compact fuel cell can be applied to small portable devices, it can readily retain  
5 its gas tightness of the fuel electrode, its catalyst loading property is good, it has flexibility in shape upon fabricating a stack, and it is excellent in productivity.

(Means to solve) A compact fuel cell, wherein a polymer electrolyte membrane is employed as an electrolyte and it  
10 is formed in a tubular form, and wherein a fuel electrode is arranged on an inner side thereof and an air electrode is arranged on an outer side thereof.

(Selected Drawing) Fig. 1

15

20

25

2001-058277

Recognized Information · Added Information

(Patent Application No.)	Japanese Patent Application No. 2001-058277
(Receipt Number)	50100298164
(Name of Document)	Patent application
(Officer Charged)	Itsuko MATSUDA 8901
(Drafted Date)	Heisei 13, March 8 (2001)

<Recognized Information · Added Information>

(Filling date)	Heisei 13, March 2 (2001)
(Applicant for Patent)	
(Identification Number of the Applicant)	301000011
(Domicile or Address)	3-1, Kasumigaseki 1-chome, Chiyoda-ku, Tokyo
(Name)	Secretary of National Institute of Advanced Industrial Science and Technology, Ministry of Economy, Trade and Industry

2001-058277

(Name of Document)	Notification of Change of Applicant (General Succession)
(Addressed to)	Commissioner of the Japanese Patent Office
(Designation of the Case)	
(Patent Application No.)	Japanese Patent Application No. 2001-58277
(Successor)	
(Identification Number of the Applicant)	301021533
(Name)	National Institute of Advanced Industrial Science and Technology
(President)	Hiroyuki YOSHIKAWA
(Contact with)	Position Name: Patent Division, National Institute of Advanced Industrial Science and Technology
	Charged Person: Takahisa NAGAYAMA
	TEL 0298-61-3282
(List of Articles Submitted)	
(Designation of Article)	Document for Certifying Succession of a Right: 1
(Designation of Citation)	
	Japanese Patent Application No. 6-39472 (1994)
(Need of Proof)	Needed

2001-058277

Information of History of Applicant

Identification Number of the Applicant (301000011)

1. Date of Change	January 4, 2001
[Reason of Change]	New Registration
Domicile	3-1, Kasumigaseki 1-chome, Chiyoda-ku, Tokyo
Name	Secretary of National Institute of Advanced Industrial Science and Technology, Ministry of Economy, Trade and Industry